


36W 0606 LED+ PANEL LIGHT


36W 600*600MM LED+ PANEL LIGHT

IoT Dimmable – Powered by EasyGo™ Smart Lighting

ITEM		PARAMETER
Input Voltage		AC200-240V
Frequency		50/60Hz
Power Factor		0.9
THD		<15%
Rated Power		36W
Initial Flux*	NW	4320 Lm(±5%)
	CW	4320 Lm(±5%)
CCT	NW	4000K
	CW	5700K
CRI	NW	80
	CW	80
Beam Angle		110°
Working Temperature		-20°C~+55°C
Storage Temperature		-25°C~+65°C(25°C)
IP Grade		IP20
Working Life-span		50000H
Power Line		0.75mm ²
Wire Connection	Brown	L
	Blue	N
Weight		3.6Kg
Color		White(RAL9016)
VARIATIONS**		
➤ <u>RS-MB0606-36W-D-NW</u>		➤ <u>RS-MB0606-36W-D-CW</u>
*Improves with the development of LED technology		
** -D: PWM Dimmable (LoRa);		

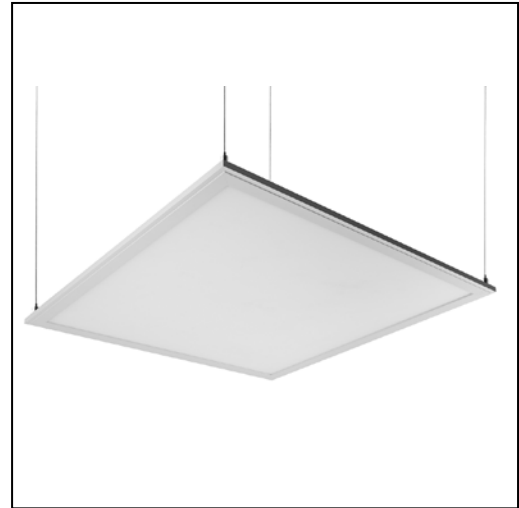

Dimensions

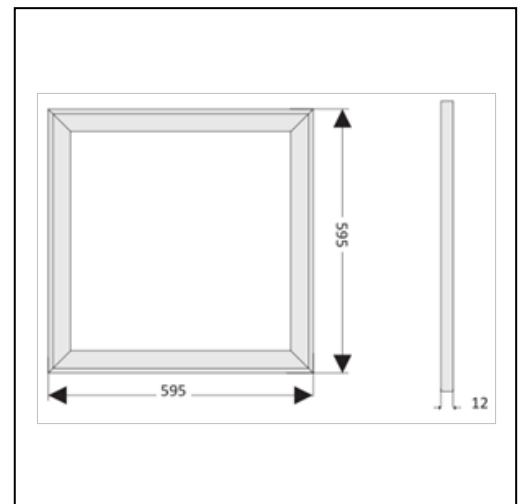

Light Distribution

